

"Slack Action" Versatility Grinder

Tool Manual – Safety, Operation and Maintenance

SAVE THIS DOCUMENT, EDUCATE ALL PERSONNEL

1 hp Variable Speed Models:

64860 (115v) 1 Phase 50/60 Hz

64861 (230v) 1 Phase 50/60 Hz

3 hp Variable Speed Models:

64862 (230v) 3 Phase 50/60 Hz

64863 (460v) 3 Phase 50/60 Hz



FIND THE MOST CURRENT OFFERING OF SUPPORT DOCUMENTS AND ACCESSORIES @ WWW.DYNABRADE.COM

⚠ WARNING

Read and understand this tool manual before operating your tool. Follow all safety rules for the protection of operating personnel as well as adjacent areas. For safety information, refer to Safety Requirements for the Use, Care and Protection of Abrasive Wheels – ANSI B7.1, Code of Federal Regulation – CFR 29 Part 1910, European Committee for Standards (EN) Hand Held Electric Motor Operated Tools – Safety Requirements and applicable State and Local Regulations.

SAFETY LEGEND

	⚠ WARNING Read and understand tool manual before work starts to reduce risk of injury to operator, visitors, and tool.	
	⚠ WARNING Eye protection must be worn at all times, eye protection to conform to ANSI Z87.1.	
	⚠ WARNING Respiratory protection to be used when exposed to contaminants that exceed the applicable threshold limit values required by law.	
	⚠ WARNING Practice safety requirements. Work alert, have proper attire, and do not operate tools under the influence of alcohol or drugs.	
	⚠ WARNING Ear protection to be worn when exposure to sound, exceeds the limits of applicable Federal, State or local statutes, ordinances and/or regulations.	
	⚠ WARNING Electric shock hazard. Avoid bodily contact with grounded objects, bodies of water. Do not damage cord set.	

⚠ WARNING

Some dust created by sanding, grinding, drilling, and other construction activities contain chemicals known to cause cancer, birth defects or other reproductive harm. Some examples of these chemicals are:

- Lead from lead-based paints
- Crystalline silica from bricks and cement and other masonry products
- Arsenic and chromium from chemically treated lumber

Your risk from these exposures varies, depending on how often you do this type of work. To reduce your exposure to these chemicals: work in a well ventilated area, and work with approved safety equipment, such as those dust masks that are specially designed to filter out microscopic particles.

GENERAL SAFETY INSTRUCTIONS

Carefully Read and save all instructions before operating or servicing any Dynabrade® Abrasive Power Tool.

Products offered by Dynabrade are not to be modified, converted or otherwise alerted from the original design without expressed written consent from Dynabrade, Inc.

Warning: When using electric tools, basic safety precautions should always be followed to reduce the risk of a fire, electric shock, and personal injury, including the following:

1. **Keep work area clean.** Cluttered areas and benches invite accidents.
2. **Consider work area environment.** Do not expose tools to rain. Keep work area well lit. Do not use power tools in damp or wet locations. Do not use tools in the presence of flammable liquids or gases.
3. **Guard against electric shock.** Be certain machine is adequately grounded before operating.

(continued on next page)

4. **Keep children away.** Do not let visitors contact tool. All visitors should be kept away from work area.
5. **Do not force tool.** It will do a better and safer job at its intended rate.
6. **Use the right tool.** Do not force a small tool or attachment to do the job of a heavy duty tool. Do not use tool for purposes not intended.
7. **Dress properly.** Do not wear loose fitting clothing or jewelry. Clothes can be caught in moving parts. Wear protective hair covering to contain long hair.
8. **Use safety glasses.** Also use face-shield or dust mask if operation area is dusty.
9. **Do not abuse cord.** Never carry tool by cord or yank it to disconnect from receptacle. Keep cord from heat, oil and sharp edges.
10. **Do not overreach.** Keep proper footing and balance at all times.
11. **Maintain tools with care.** Keep tools clean for better use and safer performance. Follow instructions for changing accessories. Inspect tool cords periodically and if damaged, have repaired by authorized service facility. Inspect extension cords periodically and replace if damaged. Keep handles dry, clean and free from oil and grease.
12. **Do not leave tool running.** Disconnect tools when not in use, before servicing, when changing belts, contact arms, etc.
13. **Remove keys and wrenches.** Form a habit of checking to see that all keys and adjusting wrenches are removed from tool before turning it on.
14. **Avoid accidental starting.** Be sure switch is off when plugging in.
15. **Out-door use extension cords.** When tool is used outdoors, use only extension cord suitable for outdoor use. They should be marked with the suffix W-A (for UL) or W (for CSA in Canada).
16. **Stay alert.** Watch what you are doing. Use common sense. Do not operate tool when you are tired.
17. **Check damaged parts.** Before further use of the tool, a guard or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment of moving parts, breakage of moving parts, binding of moving parts, mounting and any other conditions that may affect its operation. A guard or other part that is damaged should be properly repaired or replaced by an authorized service center unless otherwise indicated elsewhere in this instruction manual. Have defective switches replaced. Do not use tool if switch does not turn tool on or off.
18. **Avoid gaseous areas.** Do not operate electric tools in gaseous or explosive atmospheres. Motors in these tools normally spark, and the sparks can ignite fumes.
19. **Do not alter or misuse tool.** This tool is precision built. Any alteration or modification not specified is misuse and may result in a dangerous condition. Only these accessories and attachments that are found in this instruction manual are acceptable for use with this tool. The use of any other accessory or attachment might present a risk to the operator.
20. **Replacement parts.** When servicing, use only identical replacement parts. When ordering replacement parts, please specify model and serial numbers of your machine.
21. **Do not operate tool without guards.** Always replace guards after changing contact arm or abrasive belt.
22. **Do not mix grind material.** There is a potential combustion hazard if ferrous and non-ferrous grinding dust is mixed. Clean inside machine between materials.
23. **Use hearing protection.** Permanent hearing loss can result from high process noise levels.
24. **Use correct width abrasive belt.** Using abrasive belt that is narrower than the contact wheel can cause snagging of the workpiece.
25. **Mount tool securely.** Always fasten tool to bench or other support structure to prevent tipping.

Voltage Warning

Before connecting the tool to a power source (receptacle, outlet, etc.), be sure the voltage supplied is the same as what is specified on the nameplate of the tool. A power source with greater than that specified for tool can result in **serious injury** to the user as well as damage to the tool. Using a power source with voltage less than the nameplate rating is harmful to the tool's motor. If in doubt, **do not plug in the tool.**

Polarized Plugs: To reduce the risk of electric shock, this equipment has a polarized plug (one blade is wider than the other). This plug will fit in a polarized outlet only one way. If the plug does not fit in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician to install the proper outlet. Do not change the plug in any way.

Warning: Keep extension away from the immediate working area.

Maintenance Instructions

The grinder described in this manual has been designed to be maintenance-free. All bearing and moving parts are sealed and lubricated for life. Electric motor maintenance should be performed as recommended by the motor manufacturer.


Good housekeeping is essential to insuring long life of any machine tool. By keeping the machine clean and visually inspected for any wear, the machine will provide many years of service.

Before each use inspect the contact wheels, idler rolls and drive pulley for any signs of wear. Repairing or replacing worn parts early enough will prevent other parts from becoming damaged.

For Models:
64860, 64861
64862, 64863

Versatility Grinder Controls/Features

FRONT

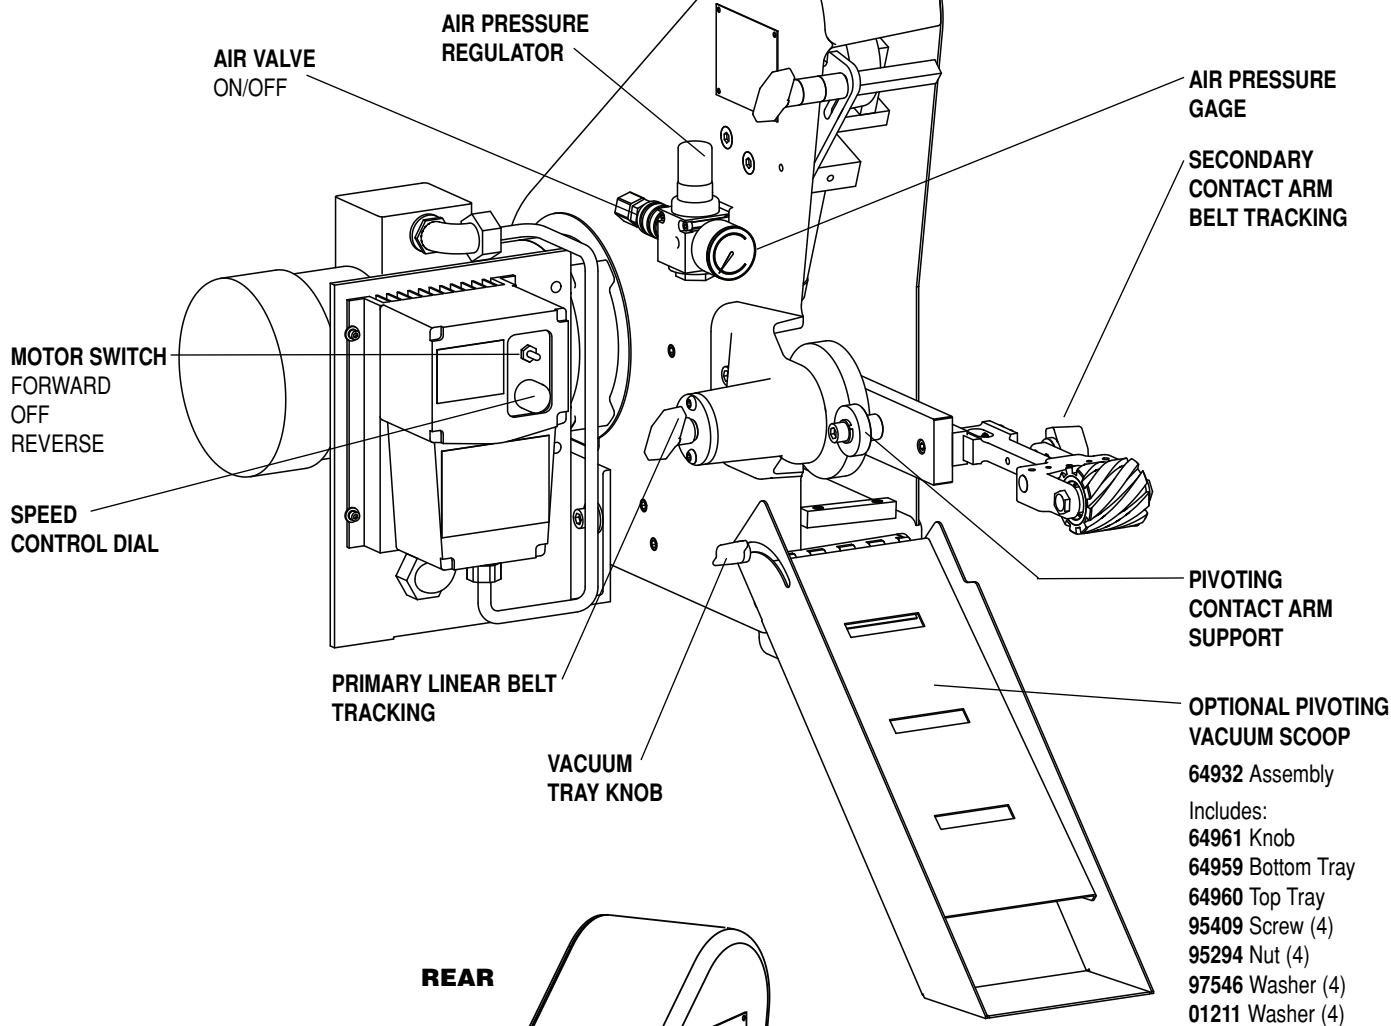

REAR

OPTIONAL ADAPTER

64923 Vacuum Hose Adapter
95354 Screws (2)

Adapter converts 4" outside diameter to 2-1/4" inside diameter to use with a standard 2-1/2" vacuum hose.

4" VACUUM PORT
(Outside Dia.)



Always fasten tool to bench or other support to prevent tipping.


BENCH MOUNT BRACKET
(2) 13/32" Thru Holes, 3" Spacing

64862, 64863


No.	Part #	Description
-----	--------	-------------

60	64955	Angular Stop Plate
61	97217	Hex Nut (2)
62	95624	Set Screw
63	64938	1/4" Tubing (7")
64	97828	Right Angle Fitting
65	64865	Adapter
66	65557	Drive Wheel
67	95202	Set Screw
68	97535	Pivot Plate Bushing
69	97311	Pivot Plate Washer
70	97236	Pivot Plate Nut
71	97558	Nut
72	64935	Adapter
73	64958	Housing Cover
74*	64923	Vacuum Hose Adapter
75	98751	Sealing Ring
76*	95409	Bolt (4)
77*	97546	Washer (4)
78*	95294	Hex Nut (4)
79	97086	Screw (2)
80	95150	Screw (2)
81	64867	Pivot Guard Plate
82	64868	Pivot Guard Bar
83	95205	Screw (2)

NOTICE: For 3hp motor/control assembly view see page 6.

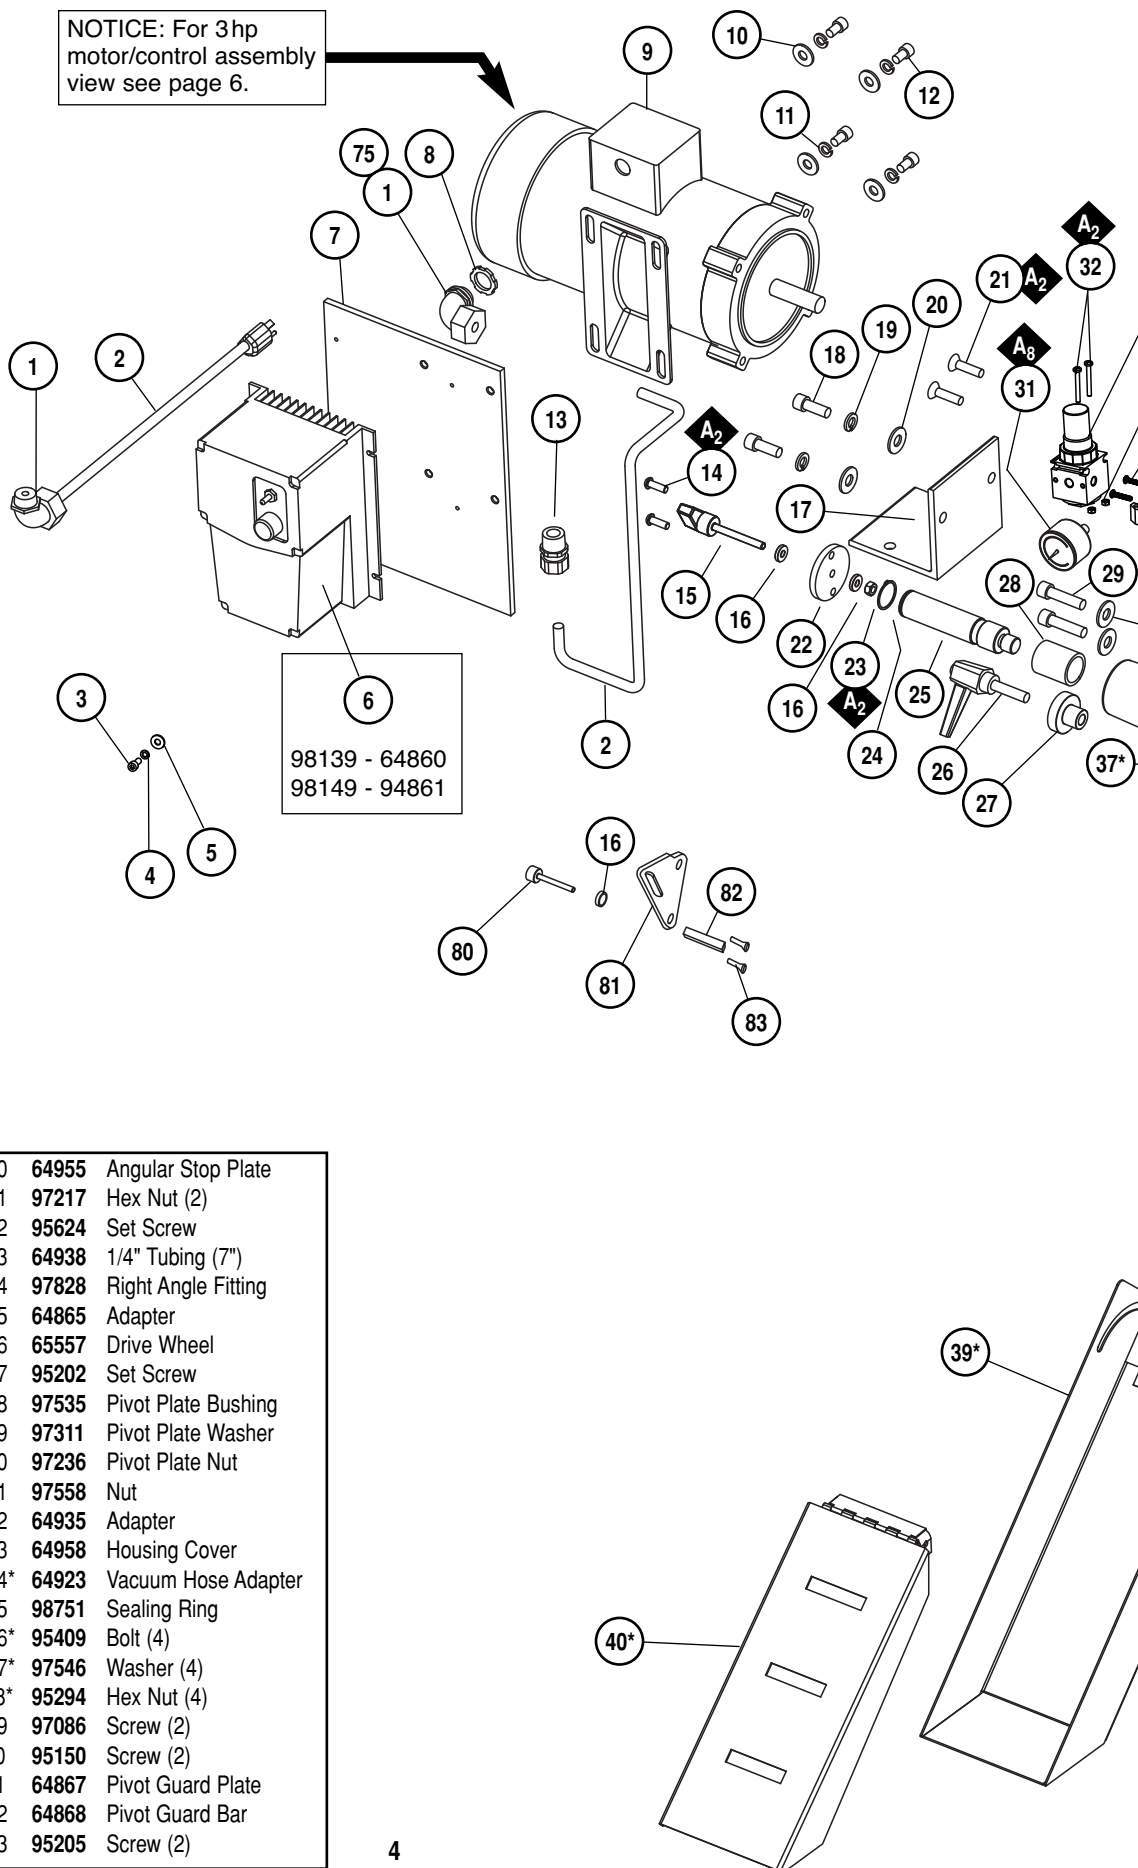

Complete Assembly

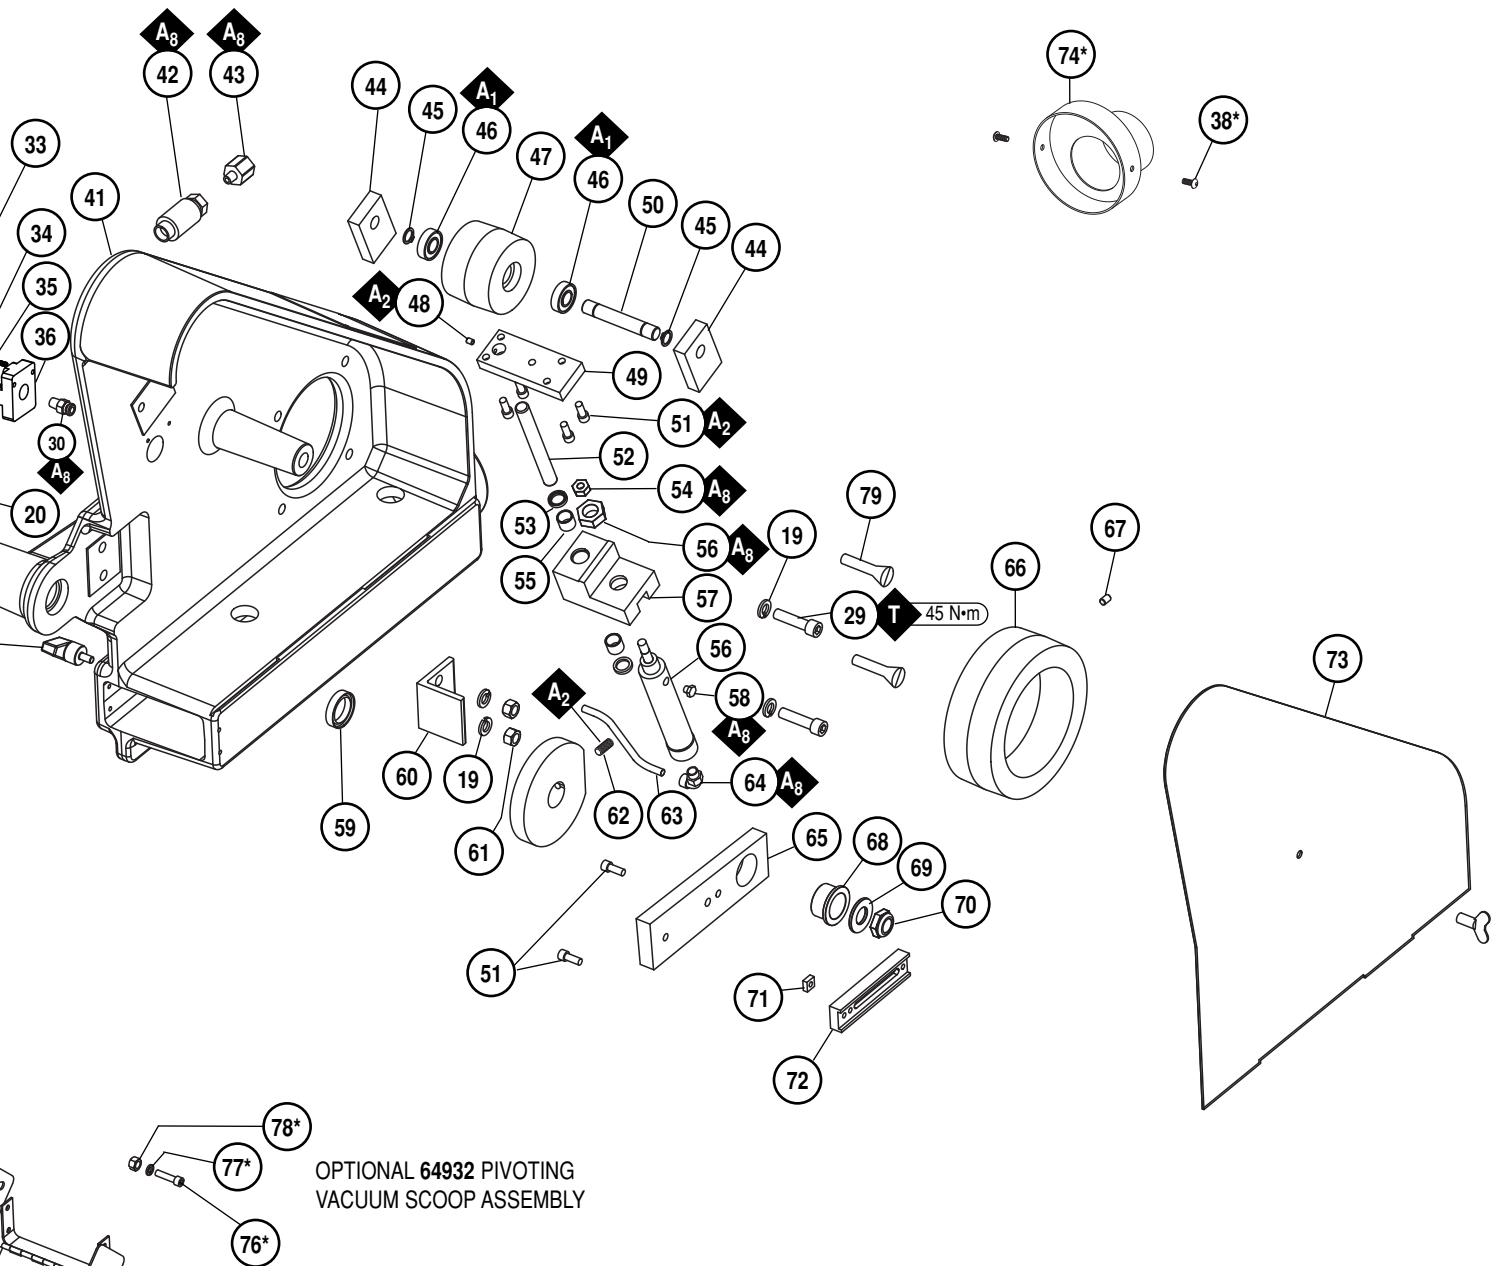

OPTIONAL 64932 PIVOTING
VACUUM SCOOP ASSEMBLY


* Individual parts that have an
asterisk next to the index number
designates optional accessories.

KEY	
A	Adhesive: A ₁ = Loctite #609 A ₂ = Loctite #271 A ₈ = Loctite #567
T	Torque: N·m x 8.85 = In. - lbs.


3hp Motor/Control Assembly

Index Key

No.	Part #	Description
1	98136	3hp Motor
2	95476	Screw (2)
3	97546	Lock Washer (2)
4	95043	Washer (2)
5	64920	Bumper
6	64926	Support Plate
7	97034	Screw (2)
8	64925	Vibration Control Mount (3)
9	64927	Support Angle
10	95178	Screw (4)
11	01211	Lock Washer (4)
12	97546	Washer (4)
13	Variable Speed Control	
	98137	460V AC
	98138	230V AC
14	97034	Screw
15	95536	Screw (2)
16	95167	Lock Washer (2)
17	64924	Support Angle
18	98751	Sealing Ring (2)
19	98746	Lock Nut (2)
20	98735	90° Elbow
21	98730	45° Elbow
22	Wire Connection Parts	
	98403	2' Flexible Conduit
	98616	Connector
	98612	Terminal
	98409	9' #12 Black Wire
	98411	3' #12 Green Wire
	98434	Wire Tag T1
	98435	Wire Tag T2
	98436	Wire Tag T3

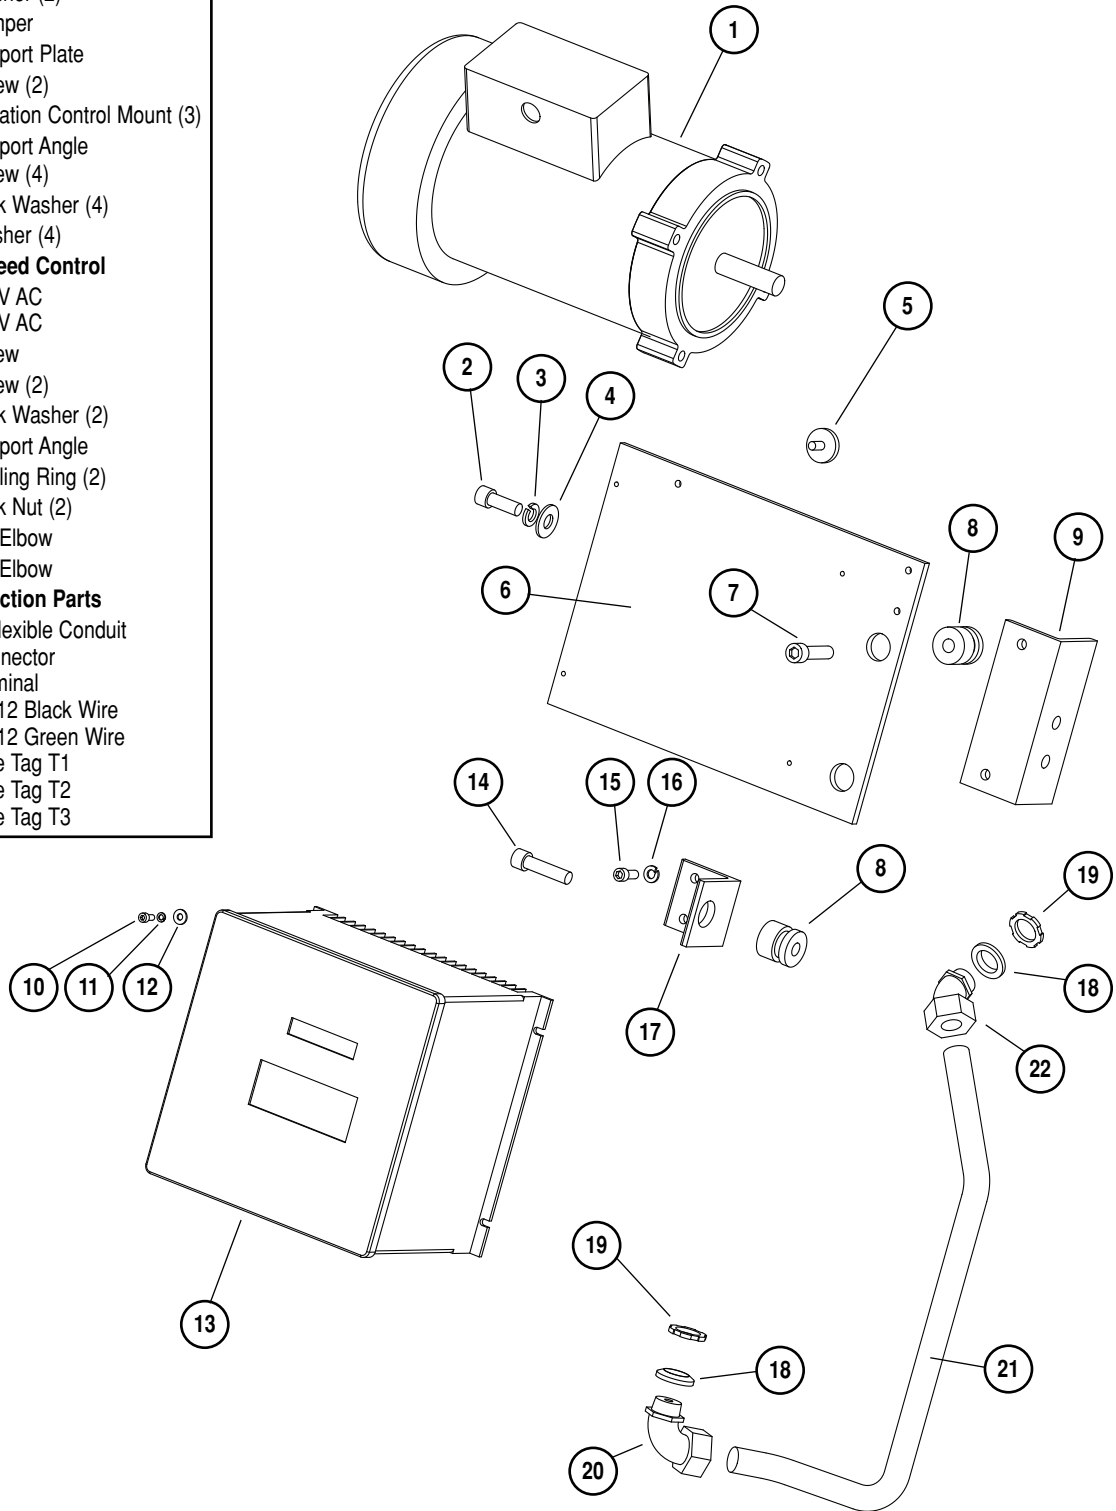


Abrasive Belt Installation

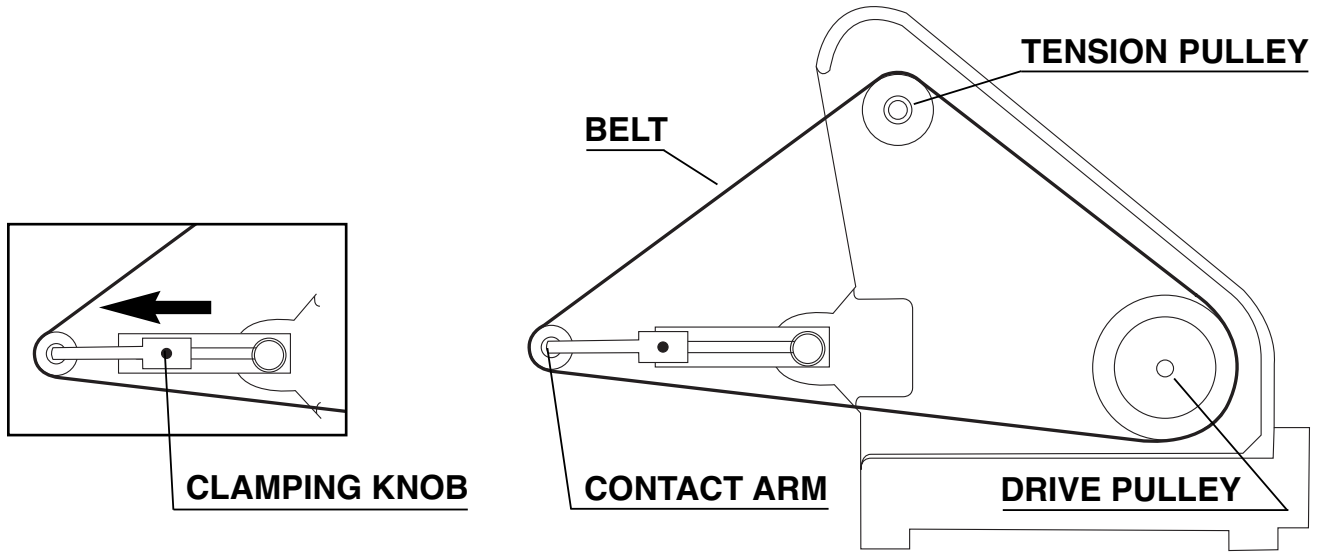

Abrasive Belt Installation Instructions

1. Turn speed control dial to "0" and motor switch to "off".
2. Push air valve towards back of machine to retract tension pulley.
3. Remove housing cover.
4. Slide abrasive belt into position shown above in abrasive belt installation diagram, centering belt on pulleys and contact arm. If necessary, loosen clamping knob, and slide contact arm back to allow easier belt positioning. After belt is in place slide contact arm forward to take up belt slack.
5. Replace housing cover.
6. Pull air valve toward front of machine to actuate tension pulley.
7. Adjust air pressure regulator for belt width (clockwise rotation increases pressure) according to Abrasive Belt Tension Diagram below.
8. Turn motor switch to forward or reverse.
9. Adjust belt tracking.
10. Adjust speed control dial to desired belt speed.

Abrasive Belt Tension Diagram

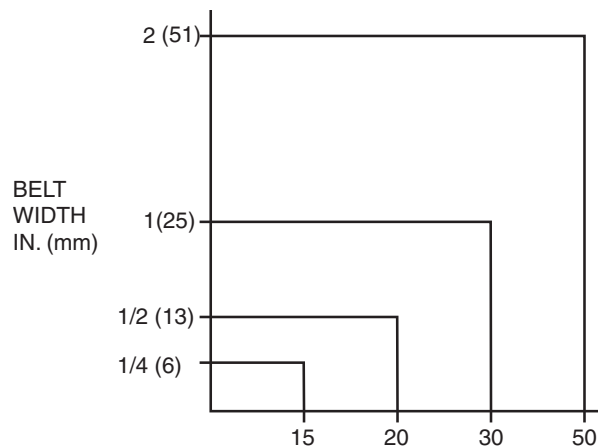

One Year Warranty

Following the reasonable assumption that any inherent defect which might prevail in a product will become apparent to the user within one year from the date of purchase, all equipment of our manufacture is warranted against defects in workmanship and materials under normal use and service. We shall repair or replace at our factory, any equipment or part thereof which shall, within one year after delivery to the original purchaser, indicate upon our examination to have been defective. Our obligation is contingent upon proper use of Dynabrade tools in accordance with factory recommendations, instructions and safety practices. It shall not apply to equipment which has been subject to misuse, negligence, accident or tampering in any way so as to affect its normal performance. Normally wearable parts such as bearings, contact wheels, rotor blades, etc., are not covered under this warranty.

Notice

All Dynabrade tools use the highest quality parts and metals available and are machined to exacting tolerances. Our warranty obligation is contingent upon proper use of our tools and cannot apply to equipment which has been subjected to misuse or a lack of maintenance during the use of this tool.

Machine Specifications

Model Number	hp (W)	Electrical Specifications	SFPM (SMPM)	Weight Pound (kg)	Width Inch (mm)	Length Inch (mm)	Height Inch (mm)
64860	1 (744)	115V 1ph 50/60	600-4000 (183-1219)	120 (55)	17 (432)	33 (838)	22 (559)
64861	1 (744)	230V 1ph 50/60	600-4000 (183-1219)	120 (55)	17 (432)	33 (838)	22 (559)
64862	3 (2232)	230V 3ph 50/60	2000-8000 (510-2440)	120 (55)	17 (432)	33 (838)	22 (559)
64863	3 (2232)	460V 3ph 50/60	2000-8000 (510-2440)	120 (55)	17 (432)	33 (838)	22 (559)

Abrasive Belts

Grit	Material	1/4" x 72" (6mm x 1,830mm)	1/2" x 72" (13mm x 1,830mm)	1" x 72" (25mm x 1,830mm)	1-1/2" x 72" (38mm x 1,830mm)	2" x 72" (51mm x 1,830mm)	2" x 78" (51mm x 1,981mm)
40	Alumina Zirconia	84807	84808	84809	84810	84811	*84812
60	Alumina Zirconia	84771	84772	84773	84774	84775	*84776
80	Alumina Zirconia	84777	84778	84779	84780	84781	84782
120	Alumina Zirconia	84789	84790	84791	84792	84793	84794
180	Aluminum Oxide	84795	84796	84797	84798	84799	*84800
220	Aluminum Oxide	84801	84802	84803	84804	84805	*84806
Super Fine	Non-Woven Nylon	*83729	83730	83731	83732	83733	*83734
Very Fine	Non-Woven Nylon	*83735	83736	83737	83738	83739	*83740
Medium	Non-Woven Nylon	N/A	83741	83742	83743	83744	*83745
Coarse	Non-Woven Nylon	N/A	83746	83747	83748	83749	*83750
Cloth	Cloth	N/A	84841	*84842	*84843	*84844	*84845

*Non-stock item – please allow 2-4 weeks delivery. Minimum order quantities may apply.

REFERENCE CONTACT INFORMATION

American National Standards Institute (ANSI)

www.ansi.org

Compressed Air & Gas Institute (CAGI)

www.cagi.org

European Committee for Standardization (PNEUROP)

www.pneurop.org

International Organization of Standards (ISO)

www.iso.org

U.S. Government Publishing Office (GPO)

www.gpo.gov

DYNABRADE, INC.

www.dynabrade.com

8989 Sheridan Drive • Clarence, NY 14031-1419 • Phone: (716) 631-0100 • Fax: 716-631-2073 • International Fax: 716-631-2524

© DYNABRADE, INC., 2009

