


Models:**52410 – 15,000 RPM****52411 – 18,000 RPM****52412 – 20,000 RPM****.7Hp/7°/Heavy Duty/Gearless
3" Disc Sander***Air Motor and Machine Parts***! WARNING**

Always operate, inspect and maintain this tool in accordance with the Safety Code for portable air tools (ANSI B186.1) and any other applicable safety codes and regulations. Please refer to Dynabrade's Warning/Safety Operating Instructions for more complete safety information.

Index Key

No.	Part	Description
1	50187	3" Dynapad
2	Exhaust Cover	
	01734	15,000 RPM
	01738	18,000 RPM
	01748	20,000 RPM
3	01744	Silencer
4	01708	Rotor Nut
5	01007	Bearing
6	01121	Shim (3/pkg.)
7	01008	Plate
8	50767	Guide Pin (2)
9	01010	Spacer
10	01028	Cylinder
11	55025	Rotor
12	01185	Blade (4/pkg.)
13	01743	Bearing Plate
14	02649	Bearing
15	53163	Handle Assembly
16	01739	Motor Assembly
17	01437	Plug
18	01548	Gasket
19	01461	Lock Nut
20	01558	Collar
21	Housing	
	01895	Model - 52410
	01896	Model - 52411
	01897	Model - 52412
22	95558	Retaining Ring
23	01448	Throttle lever
	01462	Safety Lock Lever
24	12132	Pin
25	01449	Valve Stem
26	95730	O-Ring
27	01024	O-Ring
28	01469	Speed Regulator Assy.
29	01464	Seal
30	01472	Tip Valve
31	01468	Spring
32	01494	Inlet Bushing

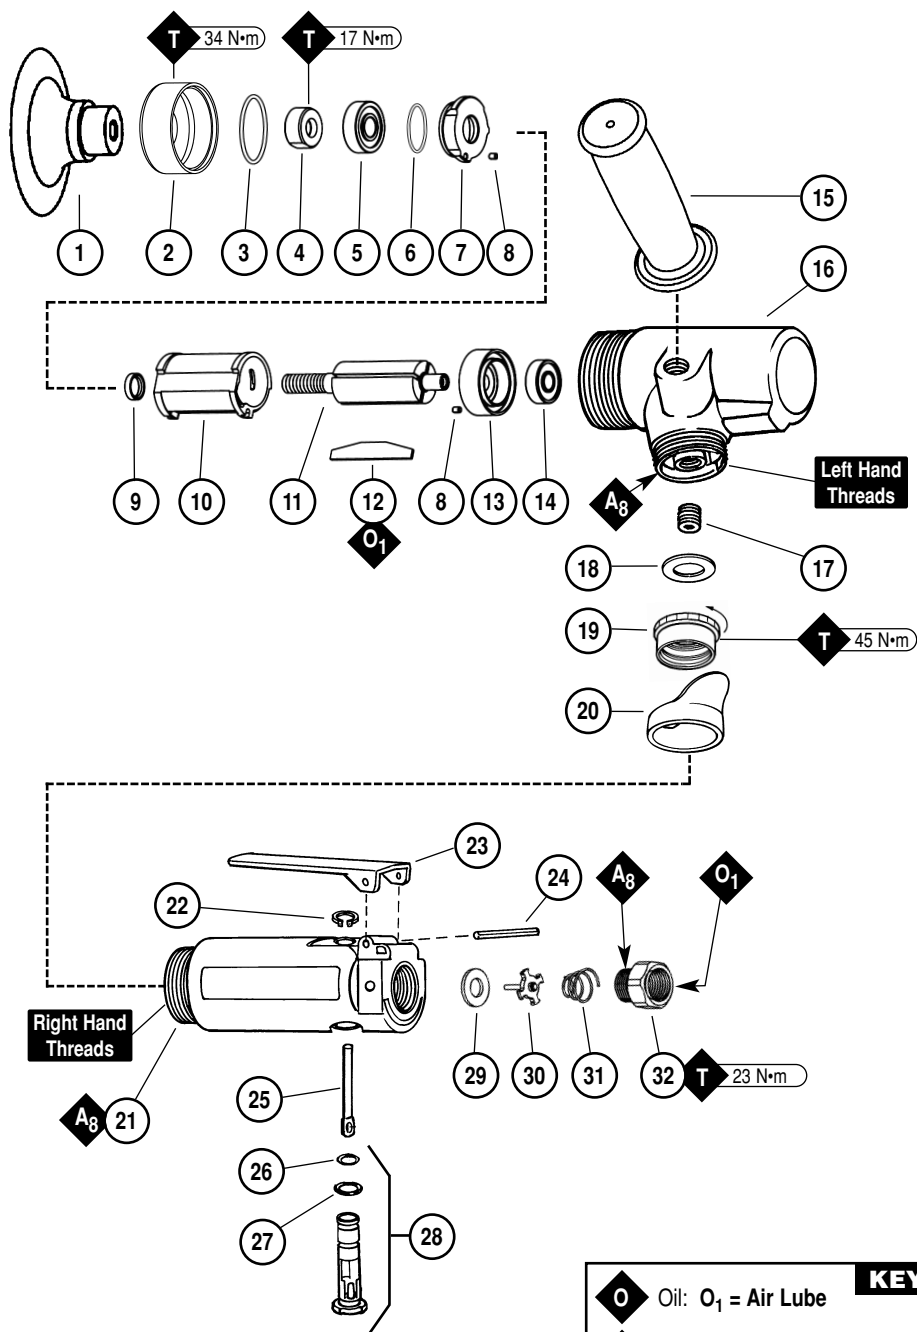

Important Operating, Maintenance and Safety Instructions

Carefully read all instructions before operating or servicing any Dynabrade® Abrasive Power Tool.

Warning: Hand, wrist and arm injury may result from repetitive work motion and overexposure to vibration.

Operating Instructions:

Warning: Eye, face, sound, respiratory and body protection must be worn while operating power tools. Failure to do so may result in serious injury or death. Follow safety procedures posted in workplace.

1. With power source disconnected from tool, securely fasten abrasive/accessory on tool.
2. Install air fitting into inlet bushing of tool. **Important:** Secure inlet bushing of tool with a wrench before attempting to install the air fitting to avoid damaging valve body housing.
3. Connect power source to tool. Be careful not to depress throttle lever in the process.
4. Check tool speed with tachometer. If tool is operating at a higher speed than the RPM marked on the tool or operating improperly, the tool should be serviced to correct the cause before use.
5. Air tools are not intended for use in explosive atmospheres and are not insulated for contact with electrical power sources. Sanding/Grinding certain materials can create explosive dust. It is the employers responsibility to notify the user of acceptable dust levels. Sanding/Grinding can cause sparks which can cause fires or explosions. It is the users responsibility to make sure the work area is free of flammable materials.

Maintenance Instructions:

1. Check tool speed regularly with a tachometer. If tool is operating at a higher speed than the RPM marked on the tool, the tool should be serviced to correct the cause before use.
2. Some silencers on air tools may clog with use. Clean and replace as required.
3. All Dynabrade Rotary Vane air motors should be lubricated. Dynabrade recommends one drop of air lube per minute for each 20 SCFM (example: if the tool specifications state 40 SCFM, set drip rate of your filter-lubricator at 2 drops per minute). Dynabrade Air Lube (P/N **95842**; 1 pt. 473 ml.) is recommended.
4. An Air Line-Filter-Regulator-Lubricator must be used with this air tool to maintain all warranties. Dynabrade recommends the following: **11405** Air Line Filter-Regulator-Lubricator – Provides accurate air pressure regulation, two-stage filtration of water contaminants and micro-mist lubrication of pneumatic components. Operates 40 SCFM @ 100 PSIG has 3/8" NPT female ports.
5. Use only genuine Dynabrade replacement parts. To reorder replacement parts, specify the **Model #**, **Serial #**, and **RPM** of your machine.
6. A Motor Tune-Up Kit (P/N **96044**) is available which includes assorted parts to help maintain motor in peak operating condition.
7. Mineral spirits are recommended when cleaning the tool and parts. Do not clean tool or parts with any solvents or oils containing acids, esters, ketones, chlorinated hydrocarbons or nitro carbons.
8. DO NOT clean or maintain air tools with chemicals that have a low flash point (example: WD-40®).

Safety Instructions:

Products offered by Dynabrade should not be converted or otherwise altered from original design without expressed written consent from Dynabrade, Inc.



- **Important:** User of tool is responsible for following accepted safety codes such as those published by the American National Standards Institute (ANSI).
- Operate machine for one minute before application to workpiece to determine if machine is working properly and safely before work begins.
- Always disconnect power supply before changing abrasive/accessory or making machine adjustments.
- Inspect abrasives/accessories for damage or defects prior to installation on tools.
- Please refer to Dynabrade's Warning/Safety Operating Instructions Tag (Reorder No. **95903**) for more complete safety information.
- **Warning:** Hand, wrist and arm injury may result from repetitive work, motion and overexposure to vibration.

Notice

All Dynabrade motors use the highest quality parts and metals available and are machined to exacting tolerances. The failure of quality pneumatic motors can most often be traced to an unclean air supply or the lack of lubrication. Air pressure easily forces dirt or water contained in the air supply into motor bearings causing early failure. It often scores the cylinder walls and the rotor blades resulting in limited efficiency and power. Our warranty obligation is contingent upon proper use of our tools and cannot apply to equipment which has been subjected to misuse such as unclean air, wet air or a lack of lubrication during the use of this tool.

Full One Year Warranty

Following the reasonable assumption that any inherent defect which might prevail in a product will become apparent to the user within one year from the date of purchase, all equipment of our manufacture is warranted against defects in workmanship and materials under normal use and service. We shall repair or replace at our factory, any equipment or part thereof which shall, within one year after delivery to the original purchaser, indicate upon our examination to have been defective. Our obligation is contingent upon proper use of Dynabrade tools in accordance with factory recommendations, instructions and safety practices. It shall not apply to equipment which has been subject to misuse, negligence, accident or tampering in any way so as to affect its normal performance. Normally wearable parts such as bearings, sanding pads, rotor blades, etc., are not covered under this warranty.

Model Number	Motor HP (W)	Motor RPM	Sound Level	Maximum Air Flow CFM/SCFM (LPM)	Air Pressure PSIG (Bars)	Spindle Thread	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
52410	.7 (522)	15,000	96 dB(A)	4/32 (906)	90 (6.2)	3/8"-24 male	2 (.9)	6 (152)	5-1/2 (140)
52411	.7 (522)	18,000	95 dB(A)	5/35 (991)	90 (6.2)	3/8"-24 male	2 (.9)	6 (152)	5-1/2 (140)
52412	.7 (522)	20,000	93 dB(A)	5/36 (1,019)	90 (6.2)	3/8"-24 male	2 (.9)	6 (152)	5-1/2 (140)

Additional Specifications: Air Inlet Thread 1/4" NPT • Hose I.D. Size 3/8" (10 mm)

Disassembly/Assembly Instructions – 3" Disc Sander .7 Hp/7° Gearless Front Exhaust

Important: The Manufacturer's warranty is void if the tool is disassembled before the warranty expires.

Notice: All of the special repair tools referenced in these instructions can be ordered from Dynabrade. Please refer to this parts page for the proper part identification.

Motor Disassembly:

1. Disconnect the tool from the air supply.
2. Carefully secure the **01739** Housing in a vise with aluminum or bronze jaws. Hold the back portion of the housing opposite the exhaust cover so as not to crush the housing.
3. Remove the **50187** 3" Dynapad.
4. Use a 1-1/2" open end or an adjustable wrench to remove the exhaust cover by turning it counterclockwise and remove the **01744** Silencer.
5. Pull the air motor out of the **01739** Housing.
6. Remove the **01739** Housing from the vise.
7. Fasten the **96346** Bearing Separator around the portion of the **01028** Cylinder that is closest to the **01743** Bearing Plate.
8. Place the motor with the separator attached on the table of the **96232** Arbor Press and using a 3/16" dia. flat end drive punch as a press tool push the rear stem of the **55025** Rotor out of the **02649** Bearing.
9. Use the **96213** Bearing Removal tool and the arbor press to remove the **02649** Bearing from the **01743** Bearing Plate.
10. Secure the vane slot portion of the **55025** Rotor in a vise with aluminum or bronze jaws so that the threaded stem of the rotor is pointing up.
11. Use an adjustable wrench to remove the **01708** Rotor Nut from the rotor by turning it counterclockwise.
12. Slip the **01008** Bearing Plate, **01007** Bearing, shims and **01010** Spacer from the rotor.

Motor Disassembly Complete.

Valve Disassembly:

1. Position the valve housing in a vise so that the air inlet is pointing up.
2. Hold the **01494** Inlet Bushing stationary with an adjustable wrench while removing the air fitting.
3. Use a wrench to remove the air inlet bushing from the valve housing.
4. Remove the **01468** Spring, **01472** Tip Valve, and **01464** Seal from the valve housing.
5. Use a 2.5 mm drive punch to remove the **12132** Pin and the throttle lever from the valve housing.
6. Remove the **95558** Retaining Ring with retaining ring pliers.
7. Push the **01469** Speed Regulator Assembly out of the housing and remove the **01449** Valve Stem.

Valve Disassembly Complete.

Valve Assembly:

Important: Clean and inspect all of the parts for wear before assembling.

1. Install the **01469** Speed Regulator Assembly (includes o-rings) into the valve housing and secure it in place with the **95558** Retaining Ring.
2. Insert the **01449** Valve Stem so that the hole in the valve stem is visible through the air inlet opening.
3. Install the **01464** Seal into the air inlet opening of the valve housing so that it lays flat.
4. Use a needle to install the **01472** Tip Valve into the air inlet opening so that the metal pin of the tip valve passes through the hole in the valve stem.
5. Place the smaller end of the **01468** Spring into the air inlet opening so that it fits onto the back of the **01472** Valve Stem.
6. Apply a small amount of the Loctite #567 (or equivalent) to the threads of the **01494** Inlet Bushing and install it into the valve housing. (Torque to 23 N•m/200 in.- lbs.)
7. Install the throttle lever and secure it in place with the **12132** Pin.
8. Hold the **01494** Inlet Bushing stationary with an adjustable wrench while installing the air fitting.

Valve Assembly Complete.

Motor Housing Assembly:

1. Secure the vane slot portion of the **55025** Rotor in a vise with aluminum or bronze jaws so that the threaded stem of the rotor is pointing up.
2. Install the **01010** Spacer onto the rotor.
3. Select .003 (.08 mm) thickness in shims from the **01121** Shim Pack and install these into the **01008** Bearing Plate.
4. Install the **01007** Bearing into the **01008** Bearing Plate.
5. Slip this assembly down onto the **55025** Rotor and secure it in place with the **01708** Rotor Nut. (Torque to 17 N•m/150 in.- lbs)
6. Check the rotor/plate clearance with a .001 (0.03) feeler gage. The clearance should be .001-.0015 (0.03-0.04 mm). If the rotor/plate clearance needs adjustment, repeat steps 3-6 and shim as required.
7. Once the proper rotor/plane clearance is achieved, install the **01185** Blades (4) that have been lubricated with the **95842** Dynabrade Air Lube (10W/NR or equivalent).
8. Install the **01028** Cylinder so that the air inlet openings in the **01743** Bearing Plate will align with the air inlet opening in the cylinder.
9. Use the **96240** Bearing Press Tool and the **96232** Arbor Press to install the **02649** Bearing into the **01743** Bearing Plate. Position the press tool so that it is resting against the outer race of the bearing when pressing the bearing into the bearing plate.
10. Use the opposite end of the **96240** Bearing Press tool to install the bearing/plate assembly onto the **55025** Rotor. Position the press tool so that it is resting against the inner race of the bearing when pressing the bearing/plate assembly onto the rotor. **Important:** Press the assembly together only until the **01743** Bearing Plate comes in contact with the **01028** Cylinder. This should create a snug fit between the bearing plates and the cylinder. A loose fit will not achieve the proper preload of the motor bearings.
11. Install the air motor into the **01739** Housing.

(continued on next page)

Disassembly/Assembly Instructions – 3" Disc Sander (continued)

12. Carefully secure the **01739** Housing in vise with aluminum or bronze jaws. Hold the back portion of the housing opposite the exhaust cover so as not to crush the housing.
13. Install the **01744** Silencer into the exhaust cover.
14. Apply a small amount of Loctite® #567 to the threads of the **01739** Housing and using a 1-1/2" or an adjustable wrench, install the exhaust cover. (Torque to 34 N•m/300 in.- lbs.)
15. Install the **50187** 3" Dynapad.

Motor Assembly Complete. Tool Assembly Complete. Please allow 30 minutes for adhesives to cure before operating tool.

Throttle Lever Positioning:

1. Secure the holding flats of the valve housing in a vise with aluminum or bronze jaws so that the **01739** Housing is pointing up.
2. Slip the **01558** Collar down onto the valve housing to expose the **01461** Lock Nut.
3. With a firm hold on the **01739** Housing, use a 34 mm or an adjustable wrench to turn the **01461** Lock Nut counterclockwise to loosen the **01739** Housing from the valve housing.
4. Orient the throttle lever to the operators desired grip and positioning. **Note:** Allow for additional rotation of the **01739** Housing as the **01461** Lock Nut is tightened.
5. With a firm hold on the **01739** Housing to reduce its rotation, use a 34 mm or an adjustable wrench to tighten the **01461** Lock Nut. (Torque to 45 N•m/400 in.- lbs.)

Loctite® is a registered trademark of the Loctite Corp.

Optional Accessories



Dynamswivel®

Swivels 360° at two locations which allows an air hose to drop straight to the floor, no matter how the tool is held.

- **94300** 1/4" NPT (Composite)
- **95460** 1/4" NPT (Aluminum)



96045 Motor Tune-Up Kit:

- Includes assorted parts to help maintain and repair motor.



Dynabrade Air Lube

- Formulated for pneumatic equipment.
- Absorbs up to 10% of its weight in water.
- Prevents rust and formation of sludge.
- Keeps pneumatic tools operating longer with greater power and less down time.

95842: 1pt. (473 ml)

95843: 1gal. (3.8L)



96232 (#2) Arbor Press

- This arbor press is ideal for the disassembly and assembly of air motors.



96213 Bearing Removal Tool

- this tool is designed to pass through the I.D. of the bearing plate and push against the I.D. of the bearing.



96346 Bearing Separator

- Use the separator to remove gears and bearings.



96240 Bearing Press Tool

- This tool is designed to safely press a bearing into a bearing plate and onto a shaft.



95281 – 19 mm open-end.

Visit Our Web Site: www.dynabrade.com

Email: Customer.Service@Dynabrade.com



DYNABRADE, INC., 8989 Sheridan Drive • Clarence, NY 14031-1490 • Phone: (716) 631-0100 • Fax: 716-631-2073 • International Fax: 716-631-2524
DYNABRADE EUROPE S.à.r.l., Zone Artisanale • L-5485 Wormeldange—Haut, Luxembourg • Telephone: 352 76 84 94 1 • Fax: 352 76 84 95 1

© DYNABRADE, INC., 2002

PRINTED IN USA